


MLA35 SERIES

General specification

- IP67 design
- Overload protection
- Short circuiting protection
- Overheating protection
- Power factor: >0,9 @Full Load, 240VAC
- Life time: >30,000h @40°C
- SELV equivalent
- Safety standards: EN 61347-1; EN61347-2-13 EN60598-1; EN60598-2-6
- EMI: EN55015; EN61000-3-2 Class C EN61000-3-3
- EMS: EN61547; Performance Criteria B EN 61000-4-5 —1000V;
- Performance Criteria C

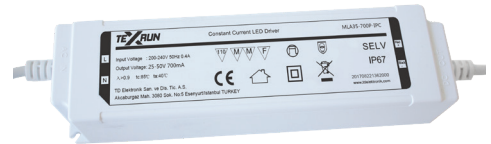

Technical specification

MODEL NO	INPUT VOLTAGE	MAX. OUTPUT POWER	OUTPUT CURRENT	OUTPUT VOLTAGE	EFFICIENCY	IP	DIMENSIONS
MLA35-700P-IPC	180-264VAC	35W	700mA	25-50VDC	85%	IP67	150 x 39 x 32mm
MLA35-1050P-IPC	180-264VAC	35W	1050mA	17-34VDC	85%	IP67	150 x 39 x 32mm
MLA35-1400P-IPC	180-264VAC	35W	1400mA	12-25VDC	85%	IP67	150 x 39 x 32mm